



Fiber Distribution Box Wall Mount (OUTDOOR)



Wall-Mount Outdoor Fiber Optic made of EG(Electro-Galvanized) steel high quality and long time for use. They can comply with IP55 or IP 65 standard. They can accommodate the fiber from 12-96 Fiber support ST/SC/FC Cable entry 8 port use cable glands EG/PG29 depend on cable dia. 2 PCS The cable can be held the preformed holes by a 2 section cable inlet or cable feed through grommet.

Features / Benefits

- One door lockable and Double Layer steel sheet protect UV
- Double folded gutter at door frame to increase rigidity and prevents water from entering while door is opened.
- Provided 4mm thickness CNC foam gasket for protection waterproof for body closure
- 4 welded studs for fixing mounting plate and service equipment inside.
- Surface finished cabinet with epoxy polyester coating.
- All screw or nut made of stainless steel
- Size: 600 mm x 440 mm x 245 mm (HighxWidthxDepth)
- Can Change one panel 12-96 port Max. Capacity use for snap-in plate 6 or 12 port
- Can support Adaptor fiber type to FC-D type, SC, ST, LC, Max:snap-plate 8 pcs
- Can support Multi-mode & Single-mode for 1 plate splice tray 12 or 24 port maximum 8 ea
- Can support FAN 2x4" for air flow at Bottom of Cabinet
- Complete set tools for hang on pole and support 4 hole for wall type
- Can support steel plate for stand UPS 500-1000VA below wall box
- Can support hinges provide 130 deg. door opening.
- Material made from EG Steel (Electro Galvanized steel)

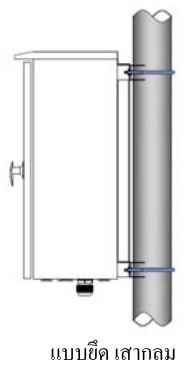

เสาเหลี่ยม

Order Information

Type	Description
B1-WM96-OUT-R	Wall Mount Enclosure OUTDOOR for CCTV (Double steel sheet)

Note: for order : Splice tray, Protection Sleeve, Pigtail, Snap-in plate, Single Plate(TOT)