




## Cat 5e & Cat 3 Tooless Keystone Jacks

Category 5e Tooless keystone jacks are, UL verified, meeting and exceeding ANSI/TIA/EIA-568-B.2 Category 5e, ISO-11801 Class D+, and EN50173 performance standards; thus provide higher bandwidth to transmit data up to 100MHz. Category 5e Tooless keystone jacks offer user-friendly termination and are easily installed into blank panels, wall outlets and surface mount boxes, and can be utilized in a wide variety of multimedia configurations in combination with our snap-in modules, customizing all work stations, consolidation points and telecommunication rooms.

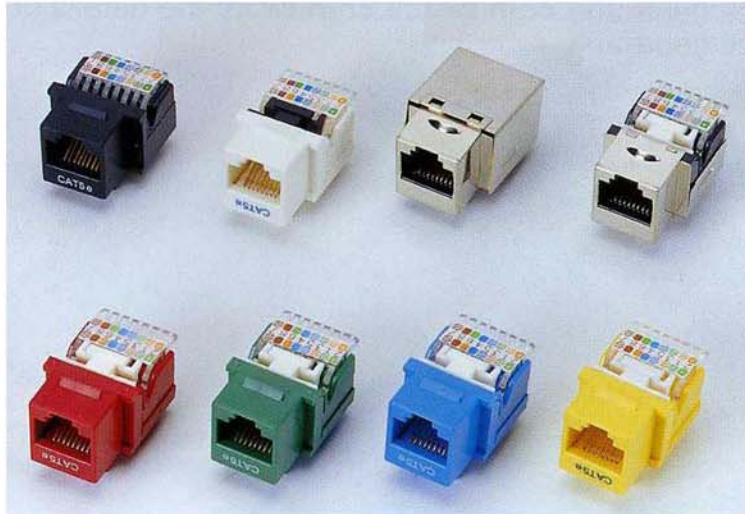

### FEATURES/BENEFITS

- Distinct label provides port numbering and universal T568A/B color coding for quick installation
- Interoperable and backward compatible to Category 3, 5 and interoperable to Cat 6
- Can be terminated a minimum of 10 times
- Termination lid provides excellent strain relief, helps control cable bend radius, and securely retains and interlocks wires with Key Lock
- Termination lid includes universal label for T568A/T568B wiring schemes
- Colors available in 7 colors, black, white, blue, green, red, gray and yellow, providing ID options for network configurations.

### PRODUCT SPECIFICATIONS

#### Housing

- High impact UL94V-0 ABS

#### IDC

- Towers: Flame retardant UL 94 V-0 PC
- Contacts: Copper alloy with nickel plating
- Compatible with 110 and Krone impact tools.
- Conductor Range: 23 ~ 26 AWG wires

#### Jack

- Jack Housing: Flame retardant UL 94 V-0 PBT
- Contacts: High performance copper alloy with nickel and 50U" gold plating
- Insertion Life Cycle: 750 plug insertions minimum

### Ordering Information

B1-MJTLC5: Modular Keystone Jack Tooless Cat.5e

B1-MJTLC6: Modular Keystone Jack Tooless Cat.6