


Outdoor Corrugated Steel Tape Armored Fiber Optic Cables, PE (4-12 Fibers)

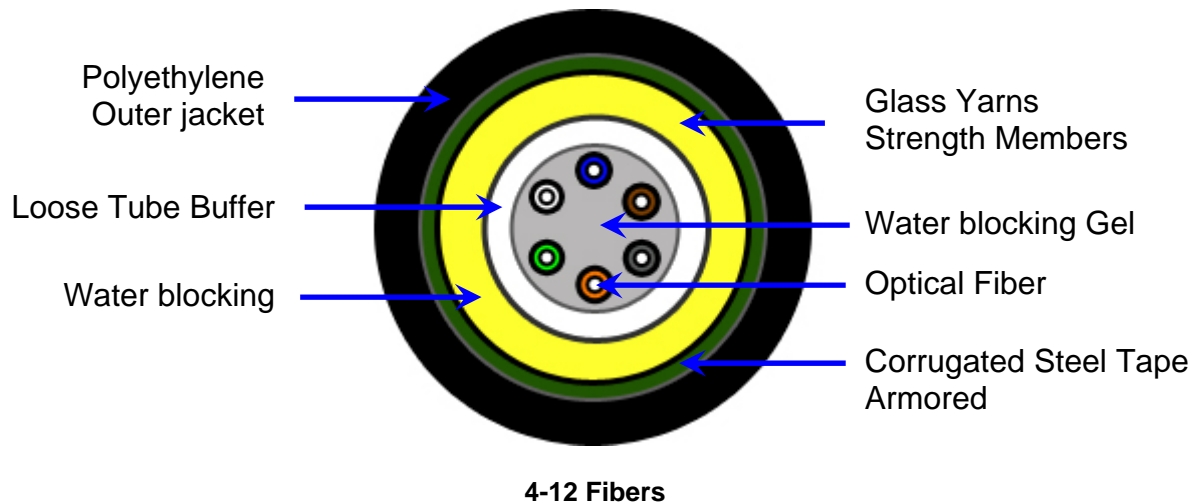

Description:

AMP OSP(outside plant) cables are designed for campus-type environments, Ducted or Directed burial underground service for long runs between buildings. AMP cables are tested to the TIA requirements for optical fiber cable performance, and are designed to exceed all of the performance requirements for current and proposed applications such as 100BASE-F, 155/622 Mbps, ATM ,AMP NETCONNECT distribution cables has been designed to meet or exceed the requirements of 10Gigabit while still supporting legacy LED and VCSEL. The system fulfills the specifications of IEE 802.3z, Gigabit Ethernet, IEE 802.3ae, 10Gigabit Ethernet. The cables are available with either singlemode, 62.5-micron Extended Grade or 50-micron and 50/125 Laser Optimized (XG).

Specification (Text in brackets [] requires a choice.)

The optical fiber cable shall contain [4,6,8,12] strain-free [singlemode, 62.5-micron Extend Grade or 50-micron, 50/125-micron laser optimized XG] fibers in a central PBT Loose tube surrounded by water-blocking gel, (Thixotropic Gel) and water blocking glass yarns are placed around the perimeter of the loose tube provide mechanical strength to the cable, and then a corrugated steel tape (with copolymer coating on both sides) is then longitudinally applied as armored. TIA/EIA 598 color coded fibers for easy identified, Outer jacket 1.9mm thickness, HDPE Polyethylene jacket for UV/harsh outdoor environment protection. The cable jacket shall be black color. The cable shall meet the applicable performance requirements listed in the following tables.

Part Numbers

Description	Part Number			
	Singlemode	62.5/125um	50/125um	50/125um (XG)
Outdoor Corrugated Steel Tape Armored, 4F	Y-1427431-4	Y-1427431-1	Y-1427431-2	Y-1427431-3
Outdoor Corrugated Steel Tape Armored, 6F	Y-1427432-4	Y-1427432-1	Y-1427432-2	Y-1427432-3
Outdoor Corrugated Steel Tape Armored, 8F	Y-1427433-4	Y-1427433-1	Y-1427433-2	Y-1427433-3
Outdoor Corrugated Steel Tape Armored, 12F	Y-1427434-4	Y-1427434-1	Y-1427434-2	Y-1427434-3
Outdoor Corrugated Steel Tape Armored, 24F	Y-1427435-4	Y-1427435-1	Y-1427435-2	Y-1427435-3

Y denotes Length: 1 = 1Km, 2 = 2Km, 3 = 3Km, 4 = 4Km.

Outdoor Corrugated Steel Tape Armored Fiber Optic Cables, PE (4-12 Fibers)



Performance Specifications

AMP OSP (outside plant) fiber optic cables are designed and tested in accordance with TIA/EIA 568B, IEEE 802.3 Standard, ISO/IEC 11801, Telcordia (Bellcore) GR-20-CORE, ITU G.652D, ICEA 596, ICEA 696 Performance specifications are measured in accordance with EIA Fiber Optic Test Procedures (EIA/TIA-455 documents) and the test procedures of IEC 60793, IEC 60794.

Mechanical Specification:

Fiber Count	Nominal O.D. mm (in)	Nominal Weight Kg/Km	Min. Bending Radius		Rated Tensile Load		Temperature		
			Installation mm	Long term mm	Installation N	Long Term N	Crush Resistance	Installation	Operation /Storage
4-fiber	10.3	108	206	103	2700	890	1500 N/ 10cm	-20 °c to +60 °c	-40 °c to +70 °c
6-fiber	10.3	108	206	103	2700	890			
8-fiber	10.3	108	206	103	2700	890			
12-fiber	10.3	108	206	103	2700	890			

Performance Characteristics (meet or exceed EIA/TIA and ISO requirements)

	XG Fiber (850/1300)	50/125 µm MM (850/1300)	62.5/125 µm MM (850/1300)	Singlemode (1310/1383/1550)
Typical Attenuation	2.4/0.6 dB/km	2.6/1.1 dB/km	2.9/0.9 dB/km	0.36/0.36/0.23 dB/km
Maximum Attenuation	3.5/1.5 dB/km	3.5/1.5 dB/km	3.5/1.0 dB/km	0.4/0.4/0.4 dB/km
OFL Bandwidth	1500/500 MHz·km	500/500 MHz·km	200/600 MHz·km	Not Applicable
850nm Laser Bandwidth	2000 MHz·km	Not Applicable	Not Applicable	Not Applicable
1000BASE-SX Distance	2-900m	2-550m	2-220m	-
1000BASE-LX Distance	2-550m	2-550m*	2-550m*	2-5000m
10GBASE-SR Distance	2-300m	2-82m	2-33m	NST
10GBASE-LX4 Distance	2-300m	2-300m	2-300m	2-10000m

* when use with mode conditioning launch patch cord

Technical Details

Approvals

RoHS Compliant – RoHS

Specifications subject to change without notice.

Revised 07/09



<http://www.ampnetconnect.com/thailand>

©Copyright 2008 by Tyco Electronics Corporation. All Rights Reserved. AMP, AMP NETCONNECT, NETCONNECT, and Tyco are trademarks. Specifications subject to change without notice.