

32-Port (Multi Optical Ports) Full Gigabit Managed Switch (B1-33032FM)

32-Port Full Gigabit Managed Switch











- ◆24x Gigabit SFP Optical Ports + 4x Gigabit RJ45 Ports + 4x Gigabit Optical Ports
- ◆L2+, with high performance management system, including VLAN based on port, VLAN based on 802.1Q, QOS, IGMP Snooping, RSTP, Broadcast Storm Restraint, Port Aggregation, Port mirroring, Port management, SNMP, RADIUS, and NTP etc.
- ◆Optical Standard: 100BASE-FX, 1000BASE-X
- ◆Packet Buffer Memory: 32Mb
- ◆MAC Address Table: 32K
- ◆Support dynamic/ static binding for IP, MAC, VLAN, Port and other elements users' definition
- ◆Support STP (802.1D) & RSTP (802.1w)

Features

High-performance of both hardware and software

Using leading network switching chip, multiple layers PCB design, as well as self-developed switch software system. With combination of hardware and software, it improves product quality from forwarding stability, packet processing speed, and other work capability.

Strong network security

Support dynamic or static binding by users' definition, such as IP, MAC, VLAN, PORT, etc. Support port isolation, to prevent communication between two neighbor network equipment within the same broadcast domain, for reducing network risk; Supports perfect storm control function which can suppress broadcast, multi-cast, and uni-cast storm; Support specific ARP inspection which can effectively prevent "ARP spoofing attack" created by hackers or attackers via ARP packets.

Convenient management and maintenance



32-Port (Multi Optical Ports) Full Gigabit Managed Switch

By easy WEB interface(http and https protocol supported), you can conveniently operate and configure all kinds of function in this switch. Support management by CLI, Telnet, Console port, which is more suitable for professional network administrator; It also allow reset by one-press, making maintenance easier.

Specification

Model	B1-33032FM
Fixed Port	24x Gigabit SFP Optical Ports
	4x Gigabit RJ45 Ports
	4x Gigabit Optical Ports
Management Port	1x Console Port
Other	1x Reset, Recover to factory configuration
Exchange Capacity	180G
Packet Forwarding Rate	Full speed filtration, 131Mpps
Working Temperature	-20~50°C
Input Voltage	AC: 110~240V/50~60Hz
Total Power Consumption	<60W

Service Features

Model	B1-33032FM
Protocol Standard	IEEE 802.3,10BASE-T Ethernet;
	IEEE 802.3u, fast Ethernet Standard;
	IEEE 802.3ab, gigabit Ethernet Standard;
	IEEE 802.3z, gigabit Ethernet Fiber Standard;(AOC fiber cable)
	IEEE 802.3x, full-duplex Ethernet data link layer flow control;
MAC Table	32K
	Support auto-upgrading
Packet Buffer Memory	32Mb
	VLAN (Max 4K)
VLAN	VLAN (Based on port)
	VLAN (802.1Q)
Spanning Tree	STP、RSTP、MSTP
Port Aggregation	Support aggregation for 4G port
Port Mirroring	Support multiple to single Port mirroring, no limit for quantity of mirroring source ports
Port Isolation	Support downstream ports isolated from each other, while opening communication with upstream ports
Port Flow Control	Support half-duplex back pressure based control;
	Support full-duplex PAUSE frame based control;
Port Speed Limit	Support port-based input/output bandwidth management
Storm Control	Prevents traffic on a LAN from being disrupted by a broadcast,




32-Port (Multi Optical Ports) Full Gigabit Managed Switch

multicast, or unicast storm on a port
Support port storm threshold setting

Security Features	Hardware support port-based IP+MAC Binding; Hardware support port-based ARP inspection detection;
	SP (Strict Priority);
	WFQ (Weighted Fair Queuing); WRR (Weighted Round Robin);
	· · · · · · · · · · · · · · · · · · ·
	Head Of Line;
	Best-Effort Service;
QOS	First come first served;
	802.1p;
	Cos/Tos, QOS;
	Differentiated Service;
	Hardware support port-based IP+MAC Binding;
Not all Oaks III	Hardware support port-based ARP inspection detection;
Network Cable Line	Support Auto-MDIX, automatic Identification straight-through cable and crossover cable
Sequence	
Negotiation Mode	Support port auto-negotiation function (auto-negotiation transmission rate and duplex mode)
System Maintenance	Support configuration file uploda/download;
	Support update packet upload;
	Support WEB reset;
	Reset by pressing key;
	Support system log save/output;
Network Management	Support WEB management ;
	Support CLI management ;

Dimension

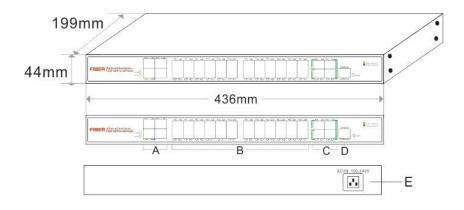

A. 4x Gigabit Rj45 Ports

B. 24x Gigabit Optical Ports


C. 4x Gigabit Optical Ports

D. Console Port

E. Power Input Port- AC100-240V,50/60Hz





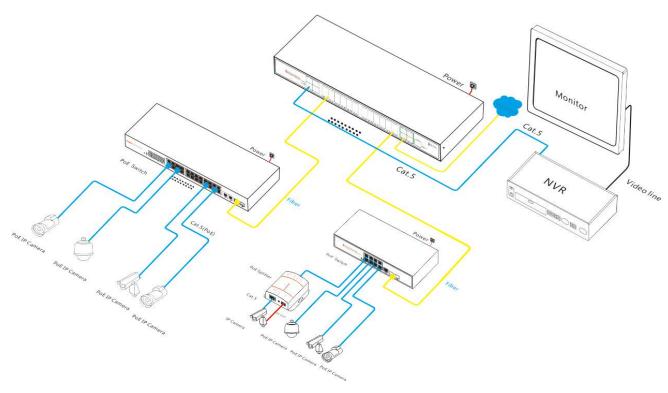

Ordering Information

Model: **B1-**33032FM

Description: 32-Port (Multi Optical Ports) Full Gigabit Managed Switch, 24x Gigabit SFP Optical

Ports + 4x Gigabit RJ45 Ports + 4x Gigabit Optical Ports. Total power is 60W.

Noted: Optical module is not included. SFP & SFP+ modules are optional.

Packing List

	32-Port (Multi Optical Ports) Full Gigabit Managed Switch(3032FM)
	Power Cable
Packing List	Mounting Kits
	User Guide
	Warranty Card